

UWR 98 水下灯





24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 07
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB

UWR 98
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;
 Temperature of water between -20°C~40°C less than 1 meter depth;
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L # ;
 7 mm step tempered glass enclosure;
 EPDM gasket;
 IP 68 PG-11 copper with nickel-coated;
 Power cable Ho7RN-F 2x1.0mm² (RGB 4x0.75 mm²) L=3.0 m;
 Mounting sleeve ABS;
 Options: PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB;
 Beam angle;

UWR 98 水下灯
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；
 产品适用不大于1米水深、-20°C~40°C的水温环境；
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；
 7 mm 厚钢化玻璃灯罩；
 三元乙丙橡胶密封圈；
 IP 68 PG-11 电缆锁头，预留 2x1.0mm² (RGB 4x0.75 mm²;) 电缆，长度3米；
 ABS预埋件；
 可选项包括: PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB;
 光束角；

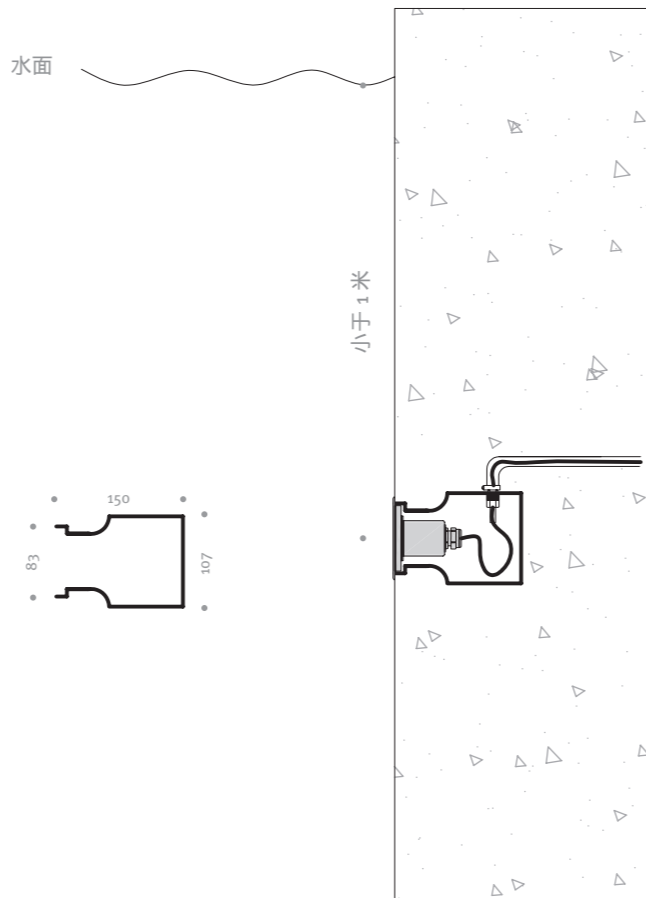

UWR 98 Guide UWR 98 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				5.6 W 5.9 W
9 861 04 01		DC 12 V / 24 V 3x2 W 单色 leds 15° 光束角 IP 68 IK 07	LS-15	—
9 861 04 02		DC 12 V / 24 V 3x2 W 单色 leds 30° 光束角 IP 68 IK 07	LS-30	—
9 862 04 01	UWR 98	DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 15° 光束角 IP 68 IK 07	LS-15	—
9 862 04 02		DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 22° 光束角 IP 68 IK 07	LS-22	—
9 862 04 03		DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 30° 光束角 IP 68 IK 07	LS-30	—
1 861 04 01	Installation sleeve	ABS预埋件, 尺寸 Φ 83mm × 150mm		

Order No.: Article No. + Lamp (Colour Temperature) , Driver and controllers need to be purchased separately
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购

