

UWR 68 水下灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 06
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB



UWR 68

High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;
 Temperature of water between -20°C ~ 40°C less than 1 meter depth;
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;
 7 mm step tempered glass enclosure;
 Silicone gasket;
 IP68 PG-11 copper with nickel-coated;
 Power cable Ho7RN-F 2 x 1.0 mm² (RGB 4x0.75 mm² / RGBW 5x0.5 mm²), L = 3.0 m;
 Mounting sleeve ABS;
 Options: PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB / RGBW;
 beam angle.

UWR 68 水下灯


高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；
 产品适用不大于 1 米水深、-20°C ~ 40°C 的水温环境；
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；
 7 mm 厚钢化玻璃灯罩；
 硅胶密封圈；
 IP68 PG-11 电缆锁头，预留 2x1.0 mm² (RGB 4x0.75 mm² / RGBW 5x0.5 mm²) 电缆，长度 3 米；
 ABS 预埋件；
 可选项包括：PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB / RGBW;
 光束角。


Φ 68.5



95



135

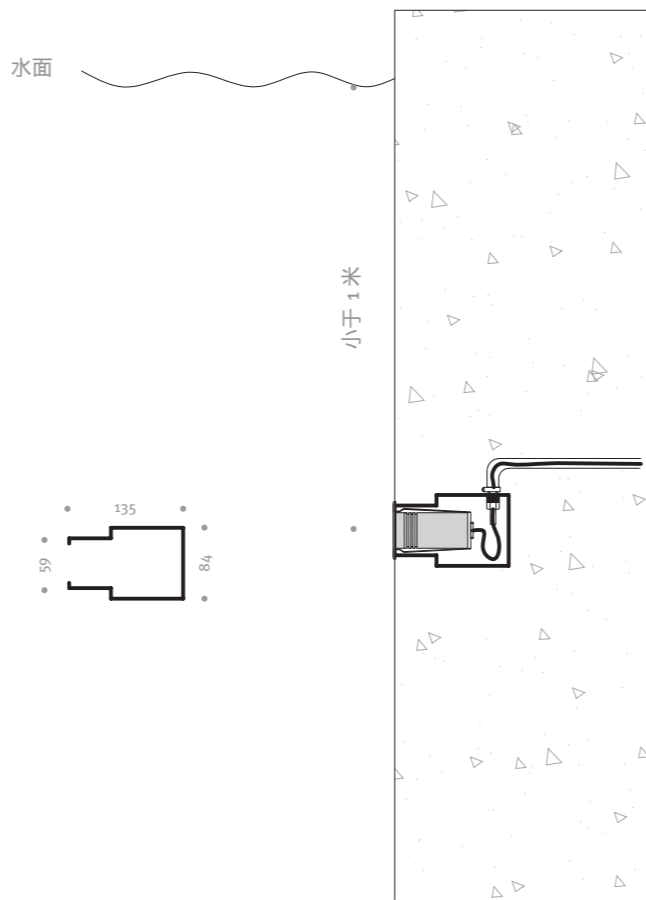

UWR 68 Guide

UWR 68 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源		
				2.6 W	3 W	4.1 W
9 851 04 01		DC 12 V / 24 V 1x3W 单色 leds 9° 光束角 IP 68 IK06	LS-9	-	-	-
9 851 04 02		DC 12 V / 24 V 1x3W 单色 leds 15° 光束角 IP 68 IK06	LS-15	-	-	-
9 851 04 03		DC 12 V / 24 V 1x3W 单色 leds 20° 光束角 IP 68 IK06	LS-20	-	-	-
9 851 04 04		DC 12 V / 24 V 1x3W 单色 leds 30° 光束角 IP 68 IK06	LS-30	-	-	-
9 851 04 05		DC 12 V / 24 V 1x3W 单色 leds 45° 光束角 IP 68 IK06	LS-45	-	-	-
9 851 04 06	UWR 68	DC 12 V / 24 V 1x3W 单色 leds 60° 光束角 IP 68 IK06	LS-60	-	-	-
9 852 04 01		DC 12 V / 24 V 1x3 W RGB 三合一 leds 20° 光束角 IP 68 IK 06	LS-20	-	-	-
9 852 04 02		DC 12 V / 24 V 1x3 W RGB 三合一 leds 30° 光束角 IP 68 IK 06	LS-30	-	-	-
9 853 04 01		DC 12 V / 24 V 1x3 W RGBW 四合一 leds 20° 光束角 IP 68 IK 06	LS-20	-	-	-
9 853 04 02		DC 12 V / 24 V 1x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 06	LS-30	-	-	-
9 851 04 11		DC 12 V / 24 V 1x3 W 单色 leds 35 / 45° 光束角 IP 68 IK 06	LA-35 / 45	-	-	-
1 851 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 59mm × 135mm				

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately
 订货方式: 产品编号+光源 (色温), 驱动电源、控制器等需要另外选购

